

Greater endurance for heavy loads at low pressure



MICHELIN CARGOXBIB and XP 27



Sizes MICHELIN CARGOXBIB

500/60 R22.5 TL 155D	710/50 R26.5 TL 170D	750/60 R30.5 TL 181D
560/60 R22.5 TL 161D	800/45 R26.5 TL 174D	800/45 R30.5 TL 176D
600/50 R22.5 TL 159D	600/60 R30.5 TL 169D	850/50 R30.5 TL 182D
710/45 R22.5 TL 165D	650/65 R30.5 TL 176D	
600/55 R26.5 TL 165D	710/50 R30.5 TL 173D	

Sizes MICHELIN XP 27


270/65 R16 TL IMP 134A8/122A8	270/65 R18 TL IMP 136A8/124A8	340/65 R18 TL 149A8/137A8
-------------------------------	-------------------------------	---------------------------

Sizes MICHELIN XS

525/65 R20.5 TL 173	24 R20.5 TL 176F
---------------------	------------------


MICHELIN XS - the truck tyre suited to agricultural use

Increased ground protection

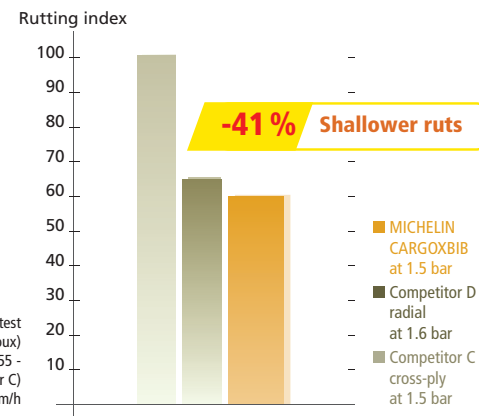

Savings in time and fuel

- Low rolling resistance in the field

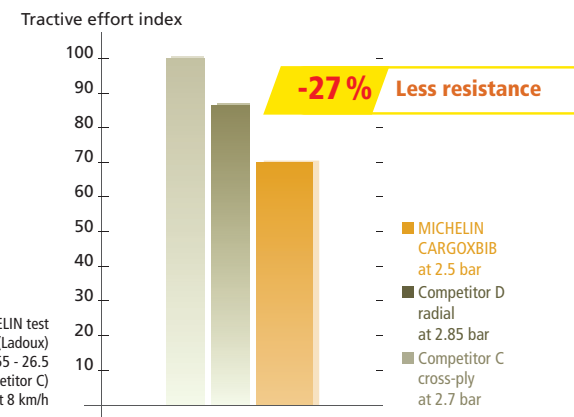

Characteristics of tyres for trailers and towed machinery

MICHELIN CARGOXBIB



Ø inches	Description	CAI	Tyre characteristics				Rim widths ⁽¹⁾ inches	Tube ⁽²⁾	75% internal volume litres	Pressure (bar) and (psi) – Load per tyre in kg ⁽²⁾															
			S mm	D mm	R' mm	R.C. mm				Bar Psi	1.00 15	1.20 17	1.50 22	1.80 26	2.00 29	2.40 35	2.80 41	3.20 46	3.60 52	4.00 58	4.20 61	4.40 64	4.60 67	4.80 70	5.00 73
			26.5	600/55 R26.5 165D TL Compatible with ag rim with H2 profile accepted.	678570	626	1348	587	3976	AG20.00 (H2)	375	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	4 200 3 560 3 100 2 750 2 300	4 675 3 995 3 465 3 080 2 565	5 380 4 640 4 020 3 570 2 970	6 090 5 290 4 570 4 065 3 370	6 565 5 725 4 935 4 395 3 635	7 510 6 590 5 670 5 050 4 170	7 950 6 980 6 000 5 345 4 415	8 390 7 365 6 335 5 640 4 660	8 830 7 750 6 670 5 935 4 905	9 270 8 140 7 000 6 230 5 150			
	710/50 R26.5 170D TL CARGOXBIB Compatible with ag rim with H2 profile accepted.	851619	732	1405	606	4135	AG24.00 (H2) AG20.00 (H2)	488	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	4 900 4 140 3 610 3 200 2 680	5 450 4 645 4 040 3 585 2 990	6 275 5 400 4 680 4 155 3 460	7 100 6 155 5 325 5 115 4 235	7 650 6 660 5 755 5 115 4 235	8 750 7 670 6 610 5 880 4 860	9 260 8 120 7 000 6 225 5 145	9 775 8 575 7 385 6 570 5 430	10 290 9 030 7 770 6 915 5 715	10 800 9 480 8 160 7 260 6 000						
	800/45 R26.5 174D TL CARGOXBIB Compatible with ag rim with H2 profile accepted.	248959	815	1395	595	4097	AG28.00 (H2) AG24.00 (H2)	561	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	5 070 4 230 3 640 3 240 2 680	5 630 4 755 4 090 3 640 3 010	6 475 5 535 4 765 4 240 3 505	7 315 6 320 5 440 4 840 4 000	7 875 6 845 5 890 5 240 4 330	9 000 7 890 6 790 6 040 4 990	9 765 8 565 7 370 6 560 5 420	10 530 9 240 7 950 6 570 5 485	11 295 9 915 8 530 7 590 6 270	12 060 10 590 9 110 8 110 6 700						
30.5	600/60 R30.5 169D TL CARGOXBIB Compatible with ag rim with H2 profile accepted.	236518	639	1496	654	4417	AG20.00 (H2)	468	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	4 730 4 000 3 490 3 100 2 590	5 265 4 490 3 905 3 470 2 890	6 060 5 220 4 525 4 020 3 345	6 860 5 955 5 145 4 575 3 795	7 395 6 445 5 560 4 945 4 095	8 460 7 420 6 390 5 680 4 700	8 955 7 855 6 765 6 015 4 975	9 450 8 290 7 140 6 350 5 250	9 945 8 725 7 515 6 685 5 525	10 440 9 160 7 890 7 020 5 800						
	650/65 R30.5 176D TL CARGOXBIB Compatible with ag rim with H2 profile accepted.	250129	677	1623	699	4776	AG20.00 (H2)	605	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	5 800 4 900 4 280 3 790 3 170	6 450 5 495 4 785 4 245 3 540	7 430 6 395 5 545 4 920 4 090	8 405 7 290 6 305 5 600 4 645	9 055 7 885 6 810 6 055 5 015	10 360 9 080 7 820 6 960 5 750	10 965 9 615 8 280 7 370 6 090	11 570 10 150 8 740 7 775 6 425	12 175 10 685 9 200 8 180 6 760	12 780 11 220 9 660 8 590 7 100						
	710/50 R30.5 173D TL CARGOXBIB Compatible with ag rim with H2 profile accepted.	002786	728	1495	649	4408	AG24.00 (H2)	537	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	5 310 4 490 3 910 3 470 2 900	5 905 5 035 4 375 3 885 3 240	6 800 5 855 5 070 4 505 3 745	7 695 6 675 5 765 5 125 4 255	8 290 7 220 6 230 5 540 4 595	9 480 8 310 7 160 6 370 5 270	10 035 8 800 7 580 6 745 5 580	10 590 9 290 8 000 7 120 5 885	11 145 9 780 8 420 7 495 6 190	11 700 10 270 8 840 7 870 6 500						
	750/60 R30.5 181D TL CARGOXBIB Compatible with ag rim with H2 profile accepted.	054202	760	1680	718	4936	AG24.00 (H2)	779	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	6 730 5 700 4 970 4 410 3 680	7 490 6 395 5 560 4 935 4 110	8 625 7 430 6 440 5 720 4 750	9 765 8 470 7 325 6 505 5 395	10 525 9 165 7 915 7 030 5 825	12 040 10 550 9 090 8 080 6 680	12 740 11 170 9 620 8 555 7 070	13 445 11 795 10 155 9 030 7 465	14 150 12 420 10 690 9 505 7 860	14 850 13 040 11 220 9 980 8 250						
	800/45 R30.5 176D TL CARGOXBIB Compatible with ag rim with H2 profile accepted.	932951	820	1495	650	4408	AG28.00 (H2)	615	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	5 370 4 490 3 860 3 440 2 840	5 965 5 045 4 335 3 865 3 190	6 860 5 870 5 055 4 495 3 715	7 755 6 700 5 770 5 130 4 240	8 350 7 255 6 245 5 555 4 590	9 540 8 360 7 200 6 400 5 290	10 350 9 075 7 815 6 950 5 740	11 160 9 790 8 430 7 495 6 195	11 970 10 505 9 045 8 040 6 650	12 780 11 220 9 660 8 590 7 100						
	850/50 R30.5 182D TL CARGOXBIB Compatible with ag rim with H2 profile accepted.	938016	861	1628	692	4778	AG28.00 (H2)	816	10 km/h 25 km/h 40 km/h 50 km/h 65 km/h	6 430 5 370 4 620 4 110 3 400	7 145 6 035 5 190 4 620 3 820	8 210 7 025 6 050 5 380 4 450	9 280 8 020 6 905 6 145 5 080	9 995 8 685 7 475 6 655 5 500	11 420 10 010 8 620 7 670 6 340	12 390 10 865 9 355 8 325 6 880	13 360 11 720 10 090 8 980 7 420	14 330 12 575 10 825 9 635 7 960	15 300 13 430 11 560 10 290 8 500						

⁽¹⁾: The reference rim is shown in bold type.

10 - 25 - 30 - 40 - 50 - 65 - 90: Maximum speed in the field/on the road in km/h

IMPORTANT: the inflation pressure must always be appropriate for the load per tyre, the speed of travel and the work to be done.